

H. Otsuki

H. Otsuki, Manager & Group Leader
Network and communication group
Marine Electronics Division

Service News

Information Request for work

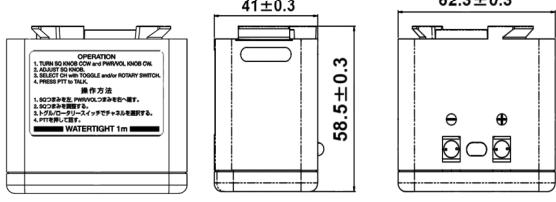
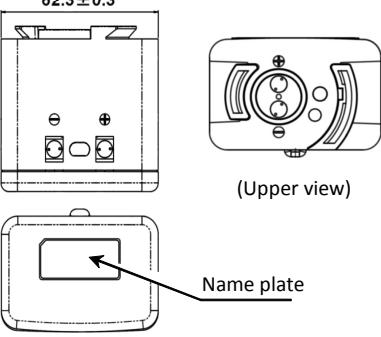
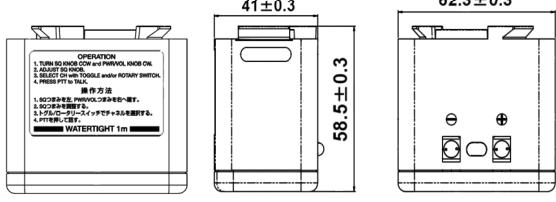
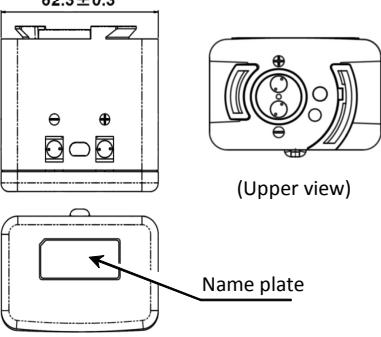
- 1 Subject : Information on the NBB-248 battery pack modification
- 2 Product name : Two-way VHF radiotelephone/ On-board communication equipment
- 3 Model number : JHS-7 (inc. JHS-7E of the series model)
- 4 Details

4.1 General

The NBB-248 secondary battery pack for the JHS-7 Two-way VHF radiotelephone/ On-board communication equipment is discontinued and modified with the alternative of the NBB-248A.

4.2 Information

The comparison table for the main specifications is shown as below.

Item	Old	New
Model number	NBB-248	NBB-248A
Stock code	NBB-248-1	NBB248A-1
Battery type	NiCd secondary battery	NiMH secondary battery
Manufacturer	SANYO Electric Co.,Ltd.	TOCAD Energy Co.,Ltd. (FDK for each cell)
Nominal voltage	7.2 V	
Rated capacity	1000 mAh	
Dimensions	  (Upper view)	  Name plate
Name plate		
Weight	230 g	200 g
Charger model No. (Not changed.)	Single type: NBA-4141 Combined type: NZB-90/91/92 etc.	

4.3 Remark

- The secondary battery is used for the on-board communication equipment in principle, and there is no need to change the certifications of the type approvals.
- With regard to the MED type approval certification, the secondary battery model number is mentioned as the option, so we have applied the new secondary battery as the variant and approved as shown on the attached letter.
- As soon as the present stock of the NBB-248 run out, the NBB-248A batteries are started to ship.
- The NBB-248A can be transported as the common freight. However, please be informed that any shipping company such as DHL would not accept the delivery to overseas.

5 Attached documents :

- Letter of Administration for MED
- Safety Data Sheet (MSDS)

6 Related Service-news and/or Technical Information :

None

7 Issue schedule for Technical Information :

None



TUV SUD BABT • Octagon House • Concorde Way • Segensworth North • Fareham, Hampshire • PO15 5RL • UK

Mr J Takita
Japan Radio Company Ltd
1-1 Shimorenjaku
5-Chome, Mitaka-Shi
Tokyo 181-8510
Japan

Your ref./from	Our ref./Name	Phone-ext/E-Mail	Fax	Date	Page
Ref: JHS-7/7E	Ref: MED001001	+44 (0)1489558255 michelle.hardy@tuv-sud.co.uk	+44 (0)1489558101	23 July 2014	1 of 1

Alternate Secondary battery for use with the JHS-7 and JHS-7E

Dear Mr Takita,

Thank you for your enquiry relating to the use of an alternative secondary battery, Type No. NBB-248A, with the JHS-7 and JHS-7E VHF Radiotelephone covered by Marine Equipment Directive (MED) Module B Certificate QQ-MED-12/05-01R.

A review has been carried out on the documentation supplied by JRC Ltd relating to the NBB-248A battery, in accordance with the requirements of ETSI EN 300 225 V1.4.1. I can confirm that the TÜV SÜD BABT Notified Body (0168) is content that the JHS-7 and JHS-7E remain compliant with the requirements of the MED as shown by Module B Certificate QQ-MED-12/05-01R when used in conjunction with the NBB-248A secondary battery. (Note 5 on Certificate QQ-MED-12/05-01R is applicable to both NBB-248 and NBB-248A batteries).

Yours sincerely

A handwritten signature in blue ink, appearing to read "M. Hardy".
Michelle Hardy
TUV SUD BABT Technical Certifier

TUV SUD BABT

Explanatory sheet about safety of product (Safety Data Sheet)
1. Basic item

Model name	Nickel-Metal Hydride Battery Pack
Model code	NBB-248A
TOCAD Model code	T6HR4/5AAUC-M-NIM-7526
Manufacturer	TOCAD ENERGY Co.,Ltd.
Address	4-1-14 HIGASHIMACHI SHIROISHISHI, MIYAGI 989-0225 JAPAN
Department in charge	Production Control Div. Products Engineering Development
Phone number	0224-25-0133
E-mail	info_quality@tocad.co.jp

2. Product information

Basic composition of the product

This product is a battery which consists of such main component as core battery pack assembled with some Nickel-Metal cells. And it consists of any combination of tube casing, safety devices and interface terminals.

3. Safety Information
3-1) Single cell

Refer to Appendix "SDS (TW-CE-E01-17)".

3-2) TRANSPORT INFORMATION

This battery does not require the following items.

- TECHNICAL INSTRUCTIONS FOR THE SAFE TRANSPORT OF DANGEROUS GOODS BY AIR(ICAO)
- IATA Dangerous Goods Regulations(IATA)
- code of federal regulations (U.S.DOT)

This battery requires the following items.

- INTERNATIONAL MARITIME DANGEROUS GOODS CODE(IMO)

From the 1st January 2012, Nickel-Metal Hydride Batteries is classed as Dangerous Goods, Class 9 in accordance with United Nations Recommendations on the Transport of Dangerous Goods and will have the following UN Number:

UN No.	Proper Shipping Name	Class or division	Packing group	Special provisions
3496	BATTERIES, NICKEL-METAL HYDRIDE	9	—	117 963

Instructions and contents of Special Provisions (117 and 963) for this UN number include:

- Specifying it is only regulated when transported by sea,
- Ni-MH button cells are not subject to the provisions of this code.
- Ni-MH cells or batteries packed with or contained in equipment are not subject to the provisions of this code.
- This Ni-MH batteries have been securely packed and protected from short circuit so They are not subject to other provisions of this code provided they are loaded in a cargo transport unit in a total quantity of less than 100 Kg gross mass.

When loaded in a cargo transport unit in a total quantity of 100 Kg gross mass or more, only subject to:

- Provided dangerous goods transportation information by a) Consignor and b) Shipper.
- Stowage and segregation provisions: as prescribed in Chapter 3 of IMDG Code: "away from" sources of heat as minimum horizontal separation of 3 metres.

Prior to transportation, confirmation that there is no leakage and no spillage from a container is necessary. Cargo must be handled without falling, dropping or breakage. Care must be taken to prevent the collapse of cargo piles or saturation by rain. Containers must be handled carefully. Packaging is constructed to prevent short-circuiting and/or electric shock. The product is handled as Non-Dangerous Goods by based on IATA(A123) for air shipment.

Person in charge



 TOCAD ENERGY Co., Ltd.

 Production Control Div. Products Engineering Development
 Makoto Kambayashi

Safety data sheet for chemical products (SDS)**1.PRODUCT AND COMPANY IDENTIFICATION**

- Product name : Nickel-Metal Hydride Battery
- Supplier's Name : FDK CORPORATION
- Supplier's Address : Hamagomu Bldg., 5-36-11 Shimbashi, Minato-ku, Tokyo 105-8677, JAPAN
- Telephone number : +81-3-3434-1271
- Manufacturer's Name : FDK TWICELL CO., LTD.
- Manufacturer's Address : 307-2 Koyagi-machi, Takasaki City, Gunma 370-0071, Japan
- Telephone number : +81-27-361-7575

2.HAZARDS IDENTIFICATION

- Most important hazard and effects

For the battery cell, chemical materials are stored in a hermetically sealed metal case, designed to withstand temperatures and pressures encountered during normal use. As a result, during normal use, there is no physical danger of ignition or explosion and chemical danger of hazardous materials' leakage.

However, if exposed to a fire, added mechanical shocks, decomposed, added electric stress by misuse, the gas release vent will be operated. The battery cell case will be breached at the extreme. Hazardous materials may be released.

Moreover, if heated strongly by the surrounding fire, acrid or harmful fume may be emitted.

Human health effects:

Inhalation: The electrolyte inhalation affects the respiratory tract membrane and the lungs. Fume may cause a cough, chest pain and dyspnea. Bronchitis and pneumonia may occur. Possibly could be carcinogen.

Skin contact: The electrolyte skin contact affects the skin seriously and may cause dermatitis.

Eye contact: The electrolyte leaked from the battery cell is strong alkali. When it goes into an eye, the cornea may be affected and it may lead to blindness.

Ingestion: The electrolyte ingestion irritates the mouth and the throat seriously results in vomiting, nausea, hematemesis, stomach pains and diarrhea.

Environmental effects:

Since a battery cell remains in the environment, do not throw out it into the environment.

- Specific hazards :

As previously described.

3.COMPOSITION / INFORMATION ON INGREDIENTS

- Substance or preparation : Preparation
- Information about the chemical nature of product :

Common chemical name / General name	CAS number	Concentration / Concentration range	Classification and hazard labeling
Hydrogen Absorbing Alloy	7440-02-0(Ni) 7440-48-4(Co) 7439-96-5(Mn) 7429-90-5(Al)	20-40%	specific hazard
Nickel-Cobalt-Zinc oxide	7440-02-0(Ni) 7440-48-4(Co) 7440-66-6(Zn)	15-25%	acute toxicity specific hazard
Nickel	7440-02-0	5-15%	specific hazard
Iron	7439-89-6	20-40%	
Carbon Black	1333-86-4	0-1%	specific hazard
Potassium Hydroxide	1310-58-3	0-15%	acute toxicity corrosivity irritant property
Sodium Hydroxide	1310-73-2		
Lithium Hydroxide	1310-65-2		

4.FIRST-AID MEASURES

Internal cell materials of an opened battery cell

- Inhalation :

Cover the victim in a blanket, move to the place of fresh air and keep quiet. Seek medical attention immediately. When dyspnea (breathing difficulty) or asphyxia (breath-hold), give artificial respiration immediately.

- Skin contact :

Remove contaminated clothes and shoes immediately. Wash the adherence or contact region with soap and plenty of water. Seek medical attention immediately.

- Eye contact :

Immediately flush eyes with water continuously for at least 15 minutes. Seek medical attention immediately.

A battery cell and internal cell materials of an opened battery cell

- Ingestion :

Do not induce vomiting. Seek medical attention immediately.

5.FIRE-FIGHTING MEASURE

Although a battery cell is not flammability, in case of fire, move it to the safe place quickly.

The following measures are taken when it cannot be moved.

- Suitable extinguishing media: Dry sand, chemical powder fire extinguishing medium.

- Specific hazards: Acid or harmful fume is emitted during fire.

- Special protective equipment for firefighters : Protective equipment written in Section 8.

6.ACCIDENTAL RELEASE MEASURES

Internal cell materials, such as electrolyte leaked from battery cell, are carefully dealt with according to the followings.

- Personal precautions :

Forbid unauthorized person to enter. Remove leaked materials with protective equipment written in Section 8.

- Environmental precautions: Do not throw out into the environment.

- Method of recovery and neutralization :

Dilute the leaked electrolyte with water and neutralize with diluted sulfuric acid. The leaked solid is moved to a container. The leaked place is fully flushed with water.

7.HANDLING AND STORAGE

- Handling

Technical measures

Prevention of user exposure: Not necessary under normal use.

Prevention of fire and explosion: Not necessary under normal use.

Precaution for safe handling: Do not damage or remove the external tube.

Specific safe handling advice: Never throw out cells in a fire or expose to high temperatures. Do not soak cells in water and seawater. Do not expose to strong oxidizers. Do not give a strong mechanical shock or throw down. Never disassemble, modify or deform. Do not connect the positive terminal to the negative terminal with electrically conductive material. In the case of charging, use only dedicated charger or charge according to the conditions specified by FDK.

- Storage

Technical measures

Storage conditions (suitable to be avoided): Avoid direct sunlight, high temperature, high humidity.

Store in cool place (temperature: -20 ~ 30 degree C, humidity: from 40 to 80%).

Incompatible products: Conductive materials, water, seawater, strong oxidizers and strong acids

Packing material (recommended, not suitable): Insulative and tear-proof materials are recommended.

8.EXPOSURE CONTROLS / PERSONAL PROTECTION

- Engineering measures :

No engineering measure is necessary during normal use. In case of internal cell materials' leakage, the information below will be useful.

- Control parameters

Common chemical name / General name	ACGIH(2011)	
	TLV-TWA	BEI
Nickel, Nickel Compounds	(As Ni) Metal : 1.5mg/m ³ Soluble compounds : 0.1mg/m ³ Insoluble compounds : 0.2mg/m ³	-
Cobalt Compounds	(As Co) 0.02mg/m ³	In urine : 15 micro g/l In blood : 1 micro g/l
Manganese Compounds	(As Mn) 0.2mg/m ³	-
Aluminum Compounds	(As Al) 1mg/m ³ (Flammable powder)	-
Zinc oxide	2mg/m ³	-
Carbon Black	3mg/m ³	-
Potassium Hydroxide	-	-
Sodium Hydroxide	-	-
Lithium Hydroxide	-	-

ACGIH: American Conference of Governmental Industrial Hygienists, Inc.

TLV-TWA: Threshold Limit Value-time weighted average concentration

BEI: Biological Exposure Indices

- Personal protective equipment

Respiratory protection: Protective mask

Hand protection: Protective gloves

Eye protection: Protective glasses designed to protect against liquid splashes

Skin and body protection: Working clothes with long sleeve and long trousers

9.PHYSICAL AND CHEMICAL PROPERTIES

- Appearance

Physical state: Solid

Form: Cylindrical and Prismatic

Color: Metallic color (without tube/label)

Odour: No odour

- pH : NA

- Specific temperatures/temperature ranges at which changes in physical state occur :

There is no useful information for the product as a mixture.

- Flash point : NA

- Explosion properties : NA

- Density : around 1.5 ~ 6.0g/cm³

- Solubility ,with indication of the solvent(s) : Insoluble in water

10.STABILITY AND REACTIVITY

- Stability : Stable under normal use

- Hazardous reactions occurring under specific conditions

By misuse of a battery cell or the like, oxygen or hydrogen accumulates in the cell and the internal pressure rises. These gases may be emitted through the gas release vent. When fire is near, these gases may take fire.

When a battery cell is heated strongly by the surrounding fire, acrid or harmful fume may be emitted.

- Conditions to avoid : Direct sunlight, high temperature and high humidity

- Materials to avoid : Conductive materials, water, seawater, strong oxidizers and strong acids

- Hazardous decomposition products: Acrid or harmful fume is emitted during fire.

11.TOXICOLOGICAL INFORMATION

There is no data available on the product itself. The information of the internal cell materials is as follows.

Nickel, Nickel Compounds

- Acute toxicity:

oral	GHS: out of Category.
skin	Unknown.
inhalation (gas)	GHS: exempt from a classification.
inhalation (steam)	Unknown.
inhalation (mist)	Unknown.

- Skin corrosivity :

Unknown.

- Serious damage and irritant property for eyes: Unknown.

- Respiratory or skin sensitization:

Respiratory sensitization: GHS: Category 1

The allergy, asthma or breathing difficulties might be caused when inhaling.

Skin sensitization: GHS: Category 1

The allergic skin reaction might be caused.

- Germline mutagenicity:

GHS: It is not possible to classify it due to data deficiency.

- Carcinogenicity :

GHS: Category 2

ACGIH: (Metal) A5 – Not suspected as a human carcinogen

ACGIH: (water-soluble compounds) A4 – Not classified as a human carcinogen obviously

ACGIH: (Insoluble compounds) A1 – Confirmed human carcinogen

NIOSH: Potential occupational carcinogen

NTP: Reasonably anticipated to be human carcinogen

IARC: (Metal) Group 2B Possibly carcinogenic to human

IARC: (Compounds) Group 1 carcinogenic to human

- Reproduction Toxicity :

GHS: It is not possible to classify it due to data deficiency.

- Certain target organ/ Systemic toxicity (single exposure):

GHS: Category 1(respiratory organ and kidney).

The disorder of the respiratory organ and the kidney is caused.

- Certain target organ/ Systemic toxicity (repeated exposure):

GHS: Category 1(respiratory organ).

The disorder of the respiratory organ is caused by long-term or repeated exposure.

Cobalt Compounds

- Acute toxicity:

oral	GHS: out of Category.
skin	Unknown.
inhalation (gas)	GHS: exempt from a classification.
inhalation (steam)	Unknown.
inhalation (mist)	GHS: It is not possible to classify it due to data deficiency.

- Skin corrosivity :

Unknown.

- Serious damage and irritant property for eyes: Unknown.

- Respiratory or skin sensitization:

Respiratory sensitization: GHS: Category 1

The allergy, asthma or breathing difficulties might be caused when inhaling.

Skin sensitization: GHS: Category 1

The allergic skin reaction might be caused.

- Germline mutagenicity: Unknown.

- Carcinogenicity :

GHS: Category 2

ACGIH: A3 –Confirmed animal carcinogen but relevance to human carcinogen is unknown.

IARC: Group 2B Possibly carcinogenic to human.

The cancer might be caused.

- Reproduction Toxicity :
 - GHS: Category 2.
 - The adverse effect on reproductive competence or the fetus might occur.
- Certain target organ/ Systemic toxicity (single exposure):
 - GHS: Category 3(respiratory tract irritating properties).
 - The respiratory organ might be stimulated.
- Certain target organ/ Systemic toxicity (repeated exposure):
 - GHS: Category 1(respiratory organ).
 - The disorder of the respiratory organ is caused by long-term or repeated exposure.

Manganese compounds

- Acute toxicity:
 - oral GHS: out of Category.
 - skin Unknown.
 - inhalation (gas) GHS: exempt from a classification.
 - inhalation (steam, mist) Unknown.
- Skin corrosivity : GHS: Category 3. Slight skin stimulation.
- Serious damage and irritant property for eyes: GHS: Category 2B. eye stimulation.
- Respiratory or skin sensitization:
 - Respiratory sensitization: Unknown.
 - Skin sensitization: Unknown.
- Germline mutagenicity : GHS: It is not possible to classify.
- Carcinogenicity : GHS: out of Category.
- Reproduction Toxicity :
 - GHS: Category 1B.
 - The adverse effect on reproductive competence or the fetus might occur.
- Certain target organ/ Systemic toxicity (single exposure):
 - GHS: Category 1(respiratory organ).
 - The disorder of the respiratory organ is caused.
- Certain target organ/ Systemic toxicity (repeated exposure):
 - GHS: Category 1(respiratory organ, nerve).
 - The disorder of the respiratory organ and nerve system is caused by long-term or repeated inhalation exposure.

Aluminum Compounds

- Acute toxicity:
 - oral, skin, inhalation(steam, dust) Unknown.
- Skin corrosivity : Unknown.
- Serious damage and irritant property for eyes: Unknown.
- Respiratory or skin sensitization:
 - Respiratory sensitization: Unknown.
 - Skin sensitization: Unknown.
- Germline mutagenicity : Unknown.
- Carcinogenicity : Unknown.
- Reproduction Toxicity : Unknown.
- Certain target organ/ Systemic toxicity (single exposure): Unknown.
- Certain target organ/ Systemic toxicity (repeated exposure):
 - GHS: Category 1 and 2.
 - The disorder of the pulmonary is caused by long-term or repeated inhalation exposure.(Category 1)
 - The disorder of the nerve system by long-term or repeated oral exposure might be caused.
 - (Category 2)

Zinc oxide

- Acute toxicity:
 - oral rat LD₅₀ > 5000mg/kg
 - inhalation (dust, mist) rat LC₅₀ > 5.7mg/l The harmful might be caused when inhaling.
- Skin corrosivity :
 - GHS: out of Category.
- Serious damage and irritant property for eyes: GHS: out of Category

- Respiratory or skin sensitization:
Respiratory sensitization: Unknown.
Skin sensitization: GHS: out of Category.
- Germline mutagenicity : Unknown.
- Carcinogenicity : GHS: out of Category.
- Reproduction Toxicity : GHS: out of Category.
- Certain target organ/ Systemic toxicity (single exposure):
GHS: Category 1.
The disorder of the whole body
- Certain target organ/ Systemic toxicity (repeated exposure):
GHS: Category 1.
The disorder of the pulmonary is caused by long-term or repeated inhalation exposure.

Carbon Black

- Acute toxicity:
oral rat LD₅₀ >15400 mg/kg
skin Unknown.
inhalation (dust) Unknown.
- Skin corrosivity : Unknown.
- Serious damage and irritant property for eyes: Unknown.
- Respiratory or skin sensitization:
Respiratory sensitization: Unknown.
Skin sensitization: Unknown.
- Germline mutagenicity : Unknown.
- Carcinogenicity :
GHS: Category 2
ACGIH: A3 –Confirmed animal carcinogen but relevance to human carcinogen is unknown.
IARC: Group 2B Possibly carcinogenic to human.
The cancer might be caused.
- Reproduction Toxicity : Unknown.
- Certain target organ/ Systemic toxicity (single exposure): Unknown.
- Certain target organ/ Systemic toxicity (repeated exposure):
GHS: Category 1
The disorder of the pulmonary is caused by long-term or repeated inhalation exposure.

Potassium Hydroxide

- Acute toxicity:
oral GHS: Category 3. Harmful if swallowed.
skin GHS: It is not possible to classify.
inhalation (steam) GHS: It is not possible to classify.
inhalation (dust) GHS: It is not possible to classify.
- Skin corrosivity : GHS: Category 1B.
Serious chemical wound of the skin and damage of eyes is caused.
- Serious damage and irritant property for eyes: GHS: Category 1.
- Respiratory or skin sensitization:
Respiratory sensitization: GHS: It is not possible to classify.
Skin sensitization: GHS: out of Category.
- Germline mutagenicity : GHS: out of Category.
- Carcinogenicity : GHS: It is not possible to classify.
- Reproduction Toxicity : GHS: It is not possible to classify.
- Certain target organ/ Systemic toxicity (single exposure):
GHS: Category 1.
The disorder of the respiratory system is caused.
- Certain target organ/ Systemic toxicity (repeated exposure)
GHS: It is not possible to classify.

Sodium Hydroxide

- Acute toxicity:

oral	GHS: It is not possible to classify.
skin	GHS: It is not possible to classify.
inhalation (gas)	GHS: out of Category.
inhalation (steam)	Unknown.
inhalation (dust)	Unknown.
- Skin corrosivity : GHS: Category 1.
Serious chemical wound of the skin and damage of eyes is caused.
- Serious damage and irritant property for eyes: GHS: Category 1. Serious damage of eyes is caused.
- Respiratory or skin sensitization:

Respiratory sensitization:	GHS: It is not possible to classify.
Skin sensitization:	GHS: out of Category.
- Germline mutagenicity :
- Carcinogenicity :
- Reproduction Toxicity :
- Certain target organ/ Systemic toxicity (single exposure):

GHS: Category 1(respiratory system).
The disorder of the respiratory organ is caused.
- Certain target organ/ Systemic toxicity (repeated exposure):

GHS: It is not possible to classify.

Lithium Hydroxide

- Acute toxicity:

oral	GHS: Category 3. Harmful if swallowed.
skin	Unknown.
inhalation (steam)	Unknown.
inhalation (dust)	GHS: Category 3. Harmful if inhaled.
- Skin corrosivity : GHS: Category 1.
Serious chemical wound of the skin and damage of eyes is caused.
- Serious damage and irritant property for eyes: GHS: Category 1.
- Respiratory or skin sensitization:

Respiratory sensitization:	GHS: It is not possible to classify.
Skin sensitization:	GHS: It is not possible to classify.
- Germline mutagenicity :
- Carcinogenicity :
- Reproduction Toxicity :
- Certain target organ/ Systemic toxicity (single exposure):

GHS: Category 1.
The disorder of the respiratory system is caused by inhalation exposure.
- Certain target organ/ Systemic toxicity (repeated exposure):

GHS: Category 1&2.
The disorder of the respiratory system is caused by long-term or repeated inhalation exposure. The disorder of the liver and the hematopoietic system by long-term or repeated oral exposure might be caused.

12. ECOLOGICAL INFORMATION

- Persistence/degradability :

Since a battery cell and the internal materials remain in the environment, do not bury or throw out into the environment.

13. DISPOSAL CONSIDERATIONS

- Recommended methods for safe and environmentally preferred disposal :

Product (waste from residues)
Do not throw out a used battery cell. Recycle it through the recycling company.

Contaminated packaging

Neither a container nor packing is contaminated during normal use. When internal materials leaked from a battery cell contaminates them, dispose them as industrial wastes subject to special control.

14.TRANSPORT INFORMATION

This battery does not require the following items.

- TECHNICAL INSTRUCTIONS FOR THE SAFE TRANSPORT OF DANGEROUS GOODS BY AIR(ICAO)
- IATA Dangerous Goods Regulations - 55th Edition Effective 1st January 2014 (IATA)
- code of federal regulations (U.S.DOT)

This battery requires the following items.

- INTERNATIONAL MARITIME DANGEROUS GOODS CODE(IMO)

From the 1st January 2012, Nickel-Metal Hydride Batteries is classed as Dangerous Goods, Class 9 in accordance with United Nations Recommendations on the Transport of Dangerous Goods and will have the following UN Number:

UN No.	Proper Shipping Name	Class or division	Packing group	Special provisions
3496	BATTERIES, NICKEL-METAL HYDRIDE	9	-	117 963

Instructions and contents of Special Provisions (117 and 963) for this UN number include:

- Specifying it is only regulated when transported by sea,
- Ni-MH button cells are not subject to the provisions of this code.
- Ni-MH cells or batteries packed with or contained in equipment are not subject to the provisions of this code.
- All other Ni-MH cells or batteries shall be securely packed and protected from short circuit. They are not subject to other provisions of this code provided they are loaded in a cargo transport unit in a total quantity of less than 100 Kg gross mass.

When loaded in a cargo transport unit in a total quantity of 100 Kg gross mass or more, only subject to:

- Provided dangerous goods transportation information by a) Consignor and b) Shipper.
- Stowage and segregation provisions: as prescribed in Chapter 3 of IMDG Code: "away from" sources of heat as minimum horizontal separation of 3 metres.

Prior to transportation, confirmation that there is no leakage and no spillage from a container is necessary. Cargo must be handle without falling, dropping or breakage. Care must be taken to prevent the collapse of cargo piles or saturation by rain. Containers must be handled carefully. Packaging is constructed to prevent short-circuiting and/or electric shock. The product is handled as Non-Dangerous Goods by based on IATA(Special Provision A123) for air shipment.

15.REGULATORY INFORMATION

- Regulations specifically applicable to the product :
- Wastes Management and Public Cleaning Law (Japan)
- Law for Promotion Effective Utilization of Resources (Japan)
- Commission Directive 2006/66/EU (EU)

16. OTHER INFORMATION

- The information contained in this Safety data sheet is based on the present state of knowledge and current legislation.
- This safety data sheet provides guidance on health, safety and environmental aspects of the product and should not be construed as any guarantee of technical performance or suitability for particular applications.

• Reference

Chemical substances information: Japan Advanced Information center of Safety and Health International Chemical Safety Cards (ICSCs):

International Occupational Safety and Health Information Center (CIS)

2011.TLVs and BEIs : American Conference of Governmental Industrial Hygienists (ACGIH)

NIOSH CARCINOGEN LIST: National Institute for Occupational Safety and Health (NIOSH)

The Ninth Report on Carcinogen: National Toxicology Program (NTP)

IARC Monographs Program on the Evaluation of Carcinogenic Risks to Humans:

International Agency for Research on Cancer (IARC)

Globally Harmonized System of Classification and Labelling of Chemicals(GHS)

National Institute of Technology and Evaluation(NITE)

First edition Dec. 1, 2003

Latest edition Jan. 1, 2014

Prepared and approved by

FDK Twicell Co., Ltd.

Engineering Department